

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan


PUBLICATION NUMBER : 59215674
 PUBLICATION DATE : 05-12-84
 APPLICATION DATE : 20-05-83
 APPLICATION NUMBER : 58089481

APPLICANT : SANYO ELECTRIC CO LTD;

INVENTOR : WASHIMI SHINGO;

INT.CL. : H01M 8/04 G05D 23/19

TITLE : TEMPERATURE CONTROL DEVICE OF FUEL CELL

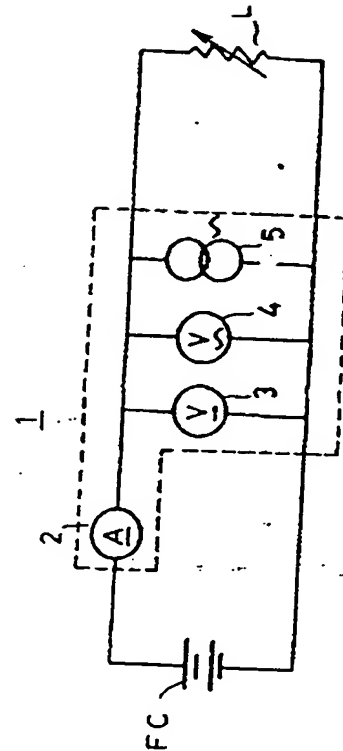

ABSTRACT : PURPOSE: To detect the cell temperature from outside by measuring the internal impedance of a cell.

CONSTITUTION: An impedance measuring device 1 is connected between a fuel cell FC and a load L and is composed of a DC ammeter 2, a DC voltmeter 3, an AC voltmeter 4, and a constant-frequency, constant-current AC generator 5. The AC generator 5 feeds currents in parallel to the cell FC and the DC load L, and the AC voltage displayed on the AC voltmeter 4 is generated by the resultant impedance Z_r of the internal impedance Z of the fuel cell FC and the load resistance R . Accordingly, individual detection signals from the impedance measuring device 1 are inputted to a control unit 6 to calculate the internal impedance Z of the cell. The value of this Z depends on the cell temperature, thereby this Z is used as an output signal to regulate a damper 7 and a blower 8 so as to control the feed air temperature and air quantity.

COPYRIGHT: (C)1984,JPO&Japio